


VISUAL COOKING C & CPE 1.20 ROLL-IN



CPE touch model

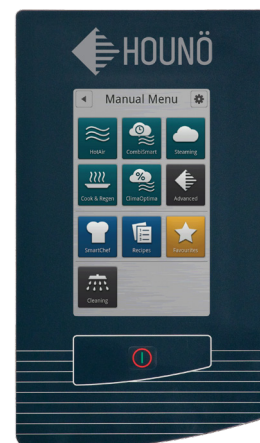

C standard model

DIMENSIONS & WEIGHT

Width	899 mm
Height with stand	1852 mm
Depth (excl. handle)	831 mm
Weight electric oven	300 kg
Weight gas oven	305 kg

CAPACITY

Tray size	1/1 GN
Number of racks:	
65 mm distance	20
85 mm distance	15
Portions	300

SPECIFICATIONS, GAS OVEN


Natural gas or Liquefied petroleum gas (LPG)	
Voltage	1 NAC 230 V
Wattage	42 kW
Current	13 A
Gas connection	3/4" outside
Water connection	3/4" outside
Drain	Ø 50 mm outside

SPECIFICATIONS, ELECTRIC OVEN

Voltage	3 NAC 400 V
Wattage	36 kW
Current	52 A
Water connection	3/4" outside
Drain	Ø 50 mm outside

GENERAL FEATURES

- Steam technology: injection steam
- Reversible fan ensures perfect baking and cooking results
- Adjustable fan speed with 9 steps
- Door hinging: left standard
- Roll-in trolley with cassette rack
- Timer function with current time, date and timer
- Manual humidity pulsing
- Preheating up to 300°C
- CTD Cool Touch Door (max outside temperature of 65°C)
- IP X5 protection
- Cabinet and oven chamber in BS 304 S 31 stainless steel
- Easily detachable door seal
- Various voltages
- Standard stand

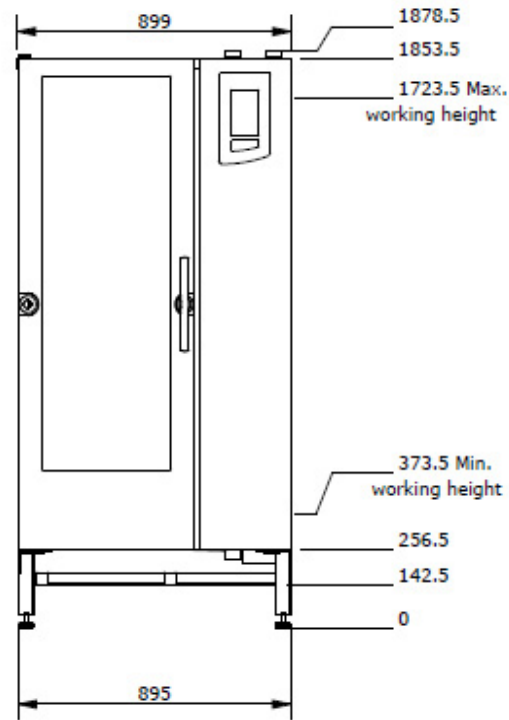

C COOKING MODES

- Hot air (30-300°C)
- Steaming with injection steam (30-130°C)
- CombiSmart® humidity control, 10 steps (30-300°C)
- Cook & Regen (30-180°C)
- Proving (30-40°C)

CPE COOKING MODES

- Hot air (30-300°C)
- Steaming with injection steam (30-130°C)
- ClimaOptima® automatic humidity control (70-300°C)
- CombiSmart® humidity control, 10 steps (30-300°C)
- SmartChef®
- Cook & Regen (30-180°C)
- Proving (30-40°C)
- Delta-T
- Cook & Hold

C STANDARD FEATURES

- Selection dial and digital display
- Memory of 50 recipes (each with up to 10 steps)
- Semi-automatic cleaning programme
- Automatic cooling
- Error registration

CPE STANDARD FEATURES

- SmartTouch® display
- Memory of 500 recipes (each with up to 15 steps)
- Cookbook with preset programmes
- CombiWash® fully automatic cleaning system
- Integrated hand shower
- Manual or automatic cooling
- Automatic humidity pulsing
- Core temperature probe, external location
- RackTimer®
- CombiNet®
- HACCP quality control
- USB connection
- Automatic service diagnosis system

ACCESSORIES

- CombiWash® fully automatic cleaning system (C)
- Integrated hand shower (C)
- Core temperature probe, external location (C)
- Sous-vide probe (CPE)
- Roll-in trolley with rack for plates
- Extra roll-in trolley with cassette rack
- Energy & water consumption meter (CPE)



HOUNÖ A/S
Alsvej 1
DK-8940 Randers SV
Denmark
T: +45 8711 4711
E: houno@houno.com
www.houno.com