



GS900 HEAVY DUTY UNDERBENCH DISHWASHER



CHARACTERISTICS

GS900 HEAVY DUTY UNDERBENCH DISHWASHER

Hot wash 55°C - Hot rinse 85°C
Stainless steel wash-arms
Consumes 2.4Lt of water per cycle.
480 plates per/hr.

Washing period cycle : 2 minutes fixed.



Basket: 500 x 500mm x 100 mm.

Door opening safety device 345 mm

Drain pump standard


Energy and water efficient

W602 x D635 x H820mm, 15 Amp GPO.



Dimensions

Overall (WxDxH)	602 x 635 x 820 mm
Basket dimensions (mm)	500 x 500 mm
Capacity	480 Plates p/hr
Motor pump power	0.37 kw
Tank element power	1.8 kw
Boiler element power	2.4 kw
Power	Voltage 240 V/15A Cycle time 2 Min fixed
Water	Water consumption 2.4 Lt per cycle Water supply pressure Atm. 2-5 600 kpa max Water inlet 19 mm Drain Drain pump standard
Other	Feet 10 mm adjustable feet Rinse temperature 85 deg.°C Wash temperature 55 deg.°C Door opening 345 mm

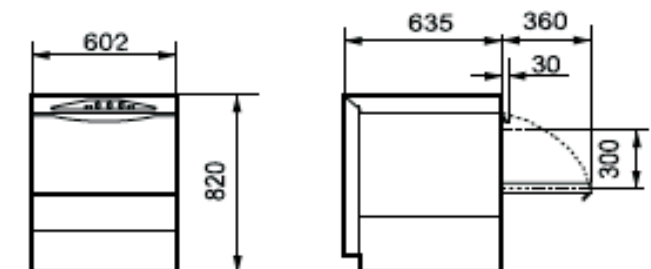

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
=ISO 9001/2000=