



GS900 HEAVY DUTY UNDERBENCH DISHWASHER



CHARACTERISTICS

GS900 HEAVY DUTY UNDERBENCH DISHWASHER

Hot wash 55°C - Hot rinse 85°C
Stainless steel wash-arms
Consumes 2.4Lt of water per cycle.
480 plates per/hr.

Washing period cycle : 2 minutes fixed.



Basket: 500 x 500mm x 100 mm.

Door opening safety device 345 mm


Drain pump standard

Energy and water efficient

W602 x D635 x H820mm, 15 Amp GPO.



Dimensions	Overall (WxDxH)	602 x 635 x 820 mm
	Basket dimensions (mm)	500 x 500 mm
	Capacity	480 Plates p/hr
	Motor pump power	0.37 kw
Power	Tank element power	1.8 kw
	Boiler element power	2.4 kw
	Voltage	240 V/15A
Water	Cycle time	2 Min fixed
	Water consumption	2.4 Lt per cycle
	Water supply pressure	Atm. 2-5 600 kpa max
	Water inlet	19 mm
Other	Drain	Drain pump standard
	Feet	10 mm adjustable feet
	Rinse temperature	85 deg.°C
	Wash temperature	55 deg.°C
	Door opening	345 mm

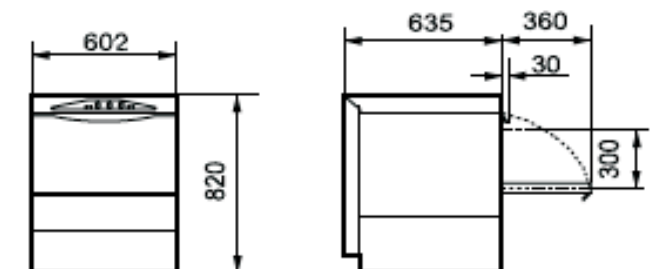

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
=ISO 9001/2000=